




TRI-BUILT® COIL ROOFING NAILS

PRODUCT DESCRIPTION

Nails: steel, electro galvanized for limited corrosion resistance, with diamond pointed, smooth shank and enlarged head.

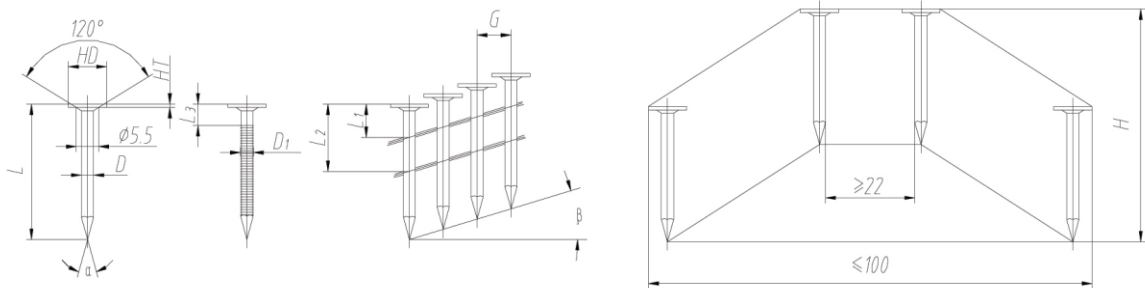

HD – Head Diameter, d – shank Diameter, HT – Head Thickness, L – Length, D1 – Ring Diameter, L1, L2 – Welding Position, L3 – Head to Ring Space, a – Point Angle, β – Shear Angle, H – Coil Height, G – Nail Gap

DIMENSIONS

Nail Length: 7/8", 1", 1-1/4", 1-1/2", 1-3/4", 2", 2-1/2", 3"
Head Size: 3/8"
Nail Diameter: .120"

FEATURES

- Electro-galvanized with a smooth layer of zinc for durability
- Diamond point for easier penetration
- Enlarged round head for extra holding strength
- Easy installation and use

PACKAGING

- 120 nails per coil
- 60 coils per box

FINISH

Electro-galvanized (standard)

SPECIFICATION

Manufactured to meet the requirements of ASTM F1667-13

USES

- Organic Roofing Felt Fastener
- Vapor Barrier Fastener
- Synthetic Roof Underlayment Fastener
- Asphalt Roofing Shingle Fastener
- Radiant Barrier Fastener