



TRI-BUILT® TILE RUNNER TILE ROOFING ACCESSORIES

ESSENTIAL TILE ROOFING COMPONENT FOR HIP AND RIDGE APPLICATIONS

MATERIAL

26 Gauge Aluminum Zinc Alloy Coated Steel, Mill Finish

SPECIFICATIONS


Heights	Part Number
4"	747009
5"	747010
6"	747011
7"	747012

PRODUCT APPROVALS:

Florida Building Code approval # 41371 (HVHZ and non HVHZ) #



AVAILABLE IN 10' LENGTHS & 4", 5", 6", 7" HEIGHTS

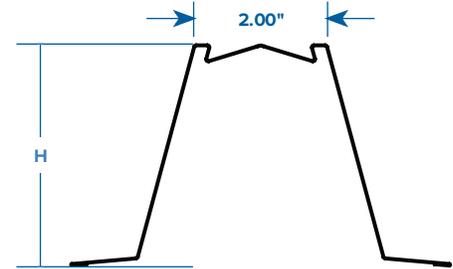

TECHNICAL INFORMATION

Min. 26 ga. ASTM A792 AZ50 Steel Tile Runner					
No.	Hip/Ridge Tile Material	Tile Adhesive	Min. Patty Size (Width x Length)	Min. Patty Weight	Max. Uplift Resistance (psf)
1	Concrete	ICP Adhesives Polyset AH-160	2 in. x 10 in.	34 g	-144
2	Concrete	DAP Touch N' Seal Storm Bond Roof Tile Adhesive	2 in. x 12 in.	30 g	-166
3	Concrete	DuPont Tile Bond Roof Tile Adhesive	2 in. x 12 in.	28 g	-146
4	Clay	ICP Adhesives Polyset AH-160	2 in. x 10 in.	34 g	-136
5	Clay	DAP Touch N' Seal Storm Bond Roof Tile Adhesive	2 in. x 12 in.	32 g	-204
6	Clay	DuPont Tile Bond Roof Tile Adhesive	2 in. x 12 in.	28 g	-107

Note: 6" on center nail spacing required.

TILE RUNNER INSTALLATION ORIENTATION WITHIN TILE ROOF ASSEMBLY FOR HIP AND RIDGE APPLICATIONS

