



TRI-BUILT® TM SBS GRANULATED

GRANULATED CAP OR FLASHING SHEET

Meets the requirements of ASTM D 6164, Type I, Grade G

FEATURES AND COMPONENTS

TRI-BUILT® TM SBS is used as a polyester-reinforced mineral-surfaced cap or flashing sheet in a variety of multi-ply roofing systems.

Ceramic-Coated Roofing Granules—Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion.

High-Quality SBS Rubber and Asphalt Blend—Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs.

Polyester-Reinforcement Mat—Provides excellent tensile strength, toughness, and puncture resistance and can accommodate stresses created by typical roof top expansion and contraction forces.


Product Application



Hot Asphalt



Cold Applied

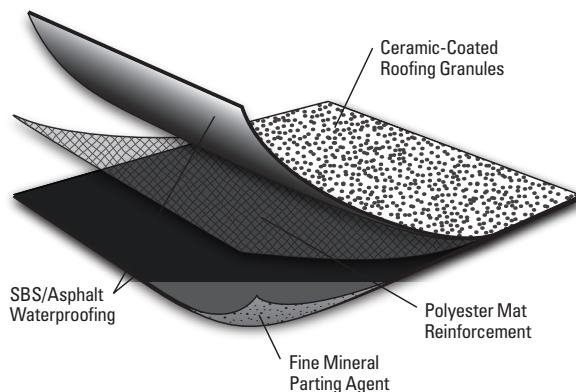

Colors: White and Black

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	101 lb (46 kg)
Rolls per Pallet	20
Pallet Weight	2,198 lb (997 kg)
Pallets per Truck**	22

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Codes and Approvals



FBC Approved

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	TRI-BUILT® TM SBS Granulated	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14.0 kN/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	25%	25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m)	65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	35%	45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	45%	45%
Installation	Dimensional Stability	D 5147	1.0%	0.2%	0.1%
	Net Mass per Unit Area	D 146	75 lb/100 ft ² (34 kg/9.29 m ²)	93 lb/100 ft ² (42 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	101 lb (46 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.