


OFTEN IMITATED, NEVER DUPLICATED

THE ORIGINAL

- The Original Slant Back Design
- The Original Weather Proof Design
- The Original Bird Proof Design
- The Original Upward Discharging Louver Design

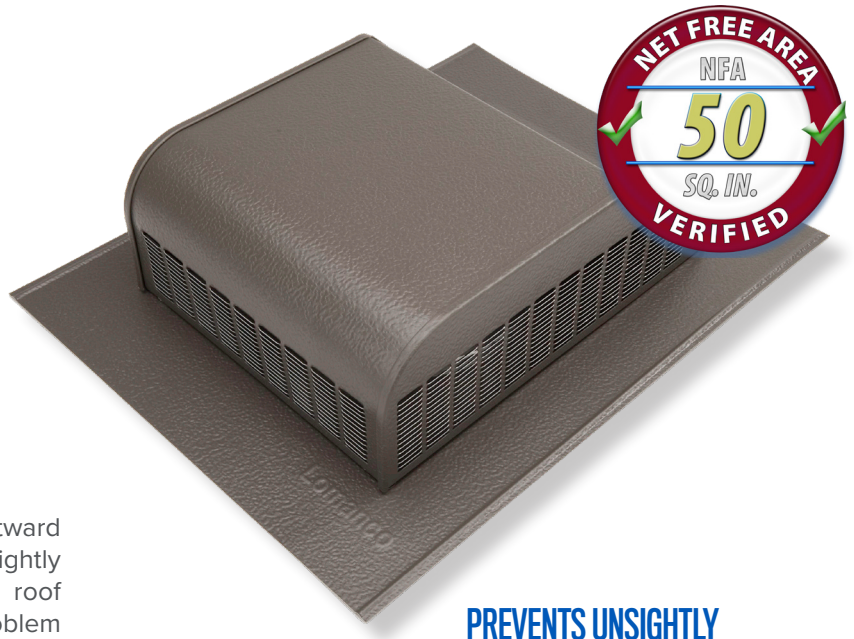

TRIBUILT® 750 Roof Louvers are built with three outward and upward discharging side vents to prevent unsightly roof streaking that is so common with ordinary roof louvers. This exclusive design also prevents the problem of bird and animal infiltration while providing maximum attic exhaust air flow and weather protection.

**PREVENTS UNSIGHTLY
ROOF DISCOLORATION**

- Designed to prevent roof discoloration
- Three sides louvered for greater air flow
- Embossed aluminum finishes for added strength, extended paint life, and blending appearance with shingles
- 750 is the ORIGINAL slant back vent
- 750-G; heavy duty galvanized steel construction
- 750-S*, 750-GS* ; metal screen insert for enhanced weather protection

Exhaust System	Attic floor space to be ventilated in square feet:																																															
	1000							1500							2000							2500							3000							3500												
	Intake							Intake							Intake							Intake							Intake																			
	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4 / IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4 / IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4 / IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4 / IV-9	Exhaust	C416	C616	C816	105/190	140	SV-10	DA-4 / IV-9								
750	5	10	7	4	3	4	4	7	8	16	11	7	6	5	7	12	10	20	14	8	7	6	8	14	12	24	17	10	9	7	10	17	15	30	21	12	11	9	12	21	17	34	23	14	12	10	14	24

Model	Overall Size (in.)	Opening Size (in.)	NFA (in. ²)
750	16 x 20 ⁵ / ₁₆ x 5	8	50
750-S*	16 x 20 ⁵ / ₁₆ x 5	8	50
750-G Galvanized Steel	16 x 20 ⁵ / ₁₆ x 5	8	50
750-GS* Galvanized Steel	16 x 20 ⁵ / ₁₆ x 5	8	50