
TRABUILT

OmniRidge® Pro

Our NEWEST Advanced Feature Low Profile Vent!

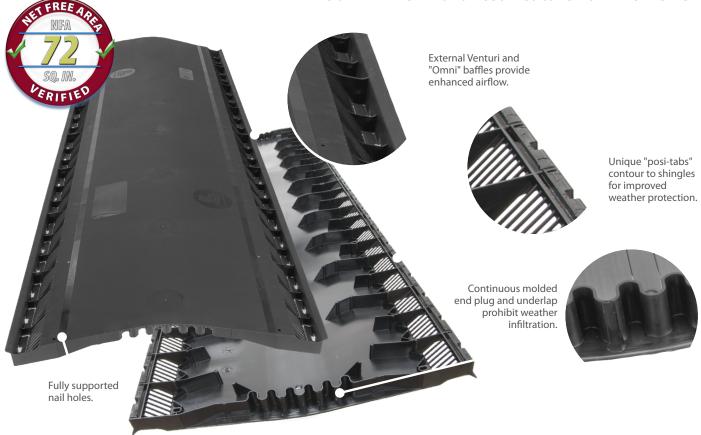

PRO4-N FEATURES

- Advanced low profile design.
- Includes 2½" ring shank nails,
 30 nails per piece
- Internal baffles
- External "Omni" baffles
- External Venturi baffle
- "Posi-tabs" contour to shingles for improved weather protection
- Weatherproof underlapping joints
- 6 drain holes per side per foot
- 18 square inches of Net Free Area per linear foot
- 10 supported nail holes
- Preformed to 2/12 pitch
- Fits roof pitches 2/12 to 16/12
- Molded-in shingle nail lines, reinforced every 2 inches
- · Slot width guide lines
- Continuous molded end plug for improved weather protection
- Lifetime Limited Warranty

| Model | Length (ft.) | NFA (in. ²) | Roof Pitch | Packaged |
|--------|-----------------|----------------------------|------------------|------------|
| PRO4-N | 4' | 72 | 2/12 To 16/12 | 10 Per Box |

| | (Attic floor space) in square feet | | | | | | |
|------------------------------------|------------------------------------|------|------|------|------|------|--|
| Area Ventilated | 1000 | 1500 | 2000 | 2500 | 3000 | 3500 | |
| PRO4-N Required (ft.) | 14' | 20' | 27' | 34' | 40' | 47' | |
| Intake Required (in ²) | 252 | 360 | 486 | 612 | 720 | 846 | |

PR04-N Ventilation Guide

MADE USA?



FBC FL28475-R1 Based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space.