


## The Rollable, Gunnable and Functional Ridge Vent

Use with TRI-BUILT® intake vents for a complete ROOF VENTILATION SYSTEM!

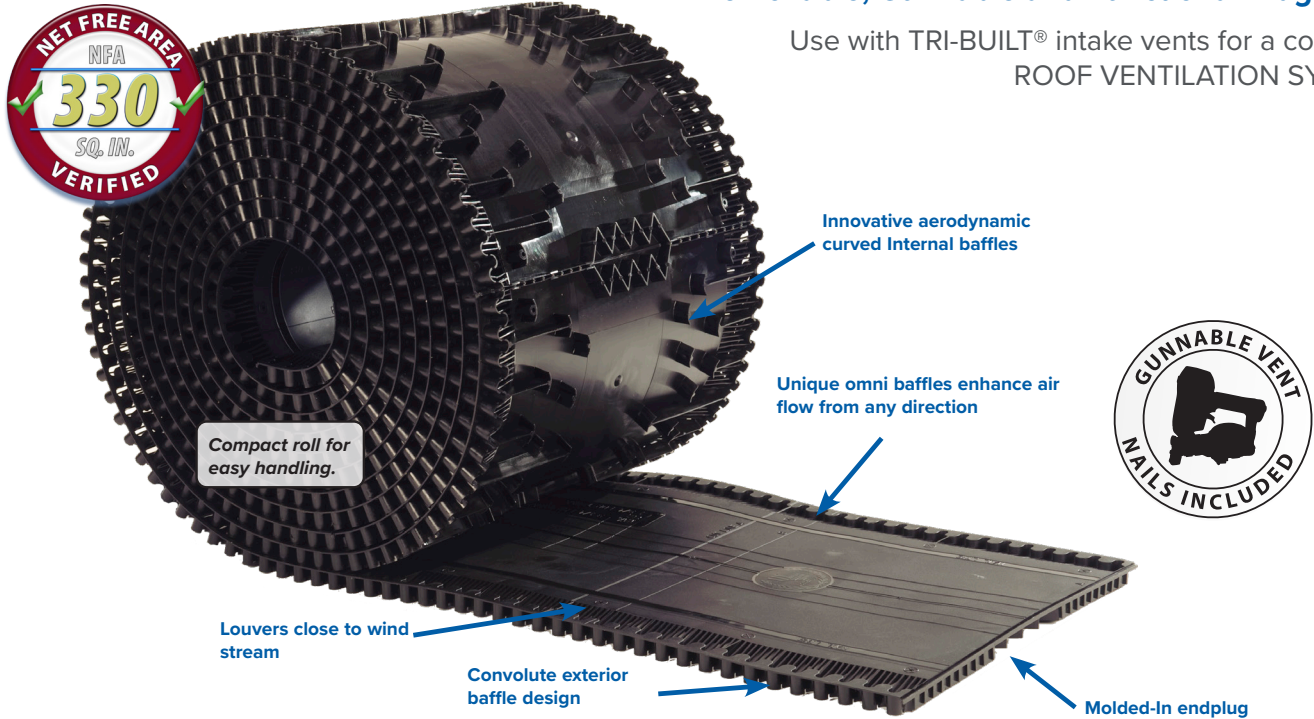

## LOR-30 FEATURES:

- Pneumatic nail gun or hammer installed
- Two coils of 1¾" nails provided
- Patented design brings you the truly functional roll out
- Compact 30 foot roll is easy to handle
- Superior weather protection and performance with no filter to clog
- Exterior convolute baffles —incurved design allows flexibility to roll up and out while maintaining its shape
- Can be cut at one foot intervals - multiple cut lines eliminates unnecessary scrap
- Patented molded fanfold end plugs - no accessories or alterations needed
- Molded centerline for fast and easy alignment
- Field tested design - proven effective under all weather conditions
- The air flow acceleration design—maximizes ventilation capacity
- Omni baffles signify air flow from any direction
- Nail holes marked every 6 inches —supported every foot - will not crush down
- Full 11 square inches of net free area per linear foot
- Engineered material guarantees longevity
- **Lifetime Limited Warranty**

### LOR-30 Ventilation Guide

(Attic floor space) in square feet

Model	Length (ft.)	NFA (in. <sup>2</sup> )	Roof Pitch	Area Ventilated	1000	1500	2000	2500	3000	3500
LOR-30	30'	330	2/12 To 16/12	Required length(ft.)	22'	33'	44'	55'	66'	77'
				Intake Required(in <sup>2</sup> )	242	363	484	605	726	847

Based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space.

MADE IN THE USA

MIAMI-DADE COUNTY APPROVED

19-1217.03

FBC FL2847-R13