
2




4 Y-Y NOILOS 36" WIDTH

SECTION Y-Y


4 Y-Y

15 7/8" ---

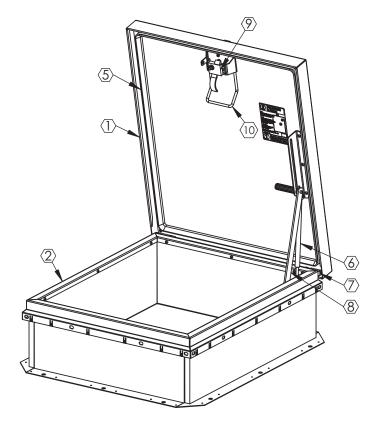

В

SHEET 1 OF 2

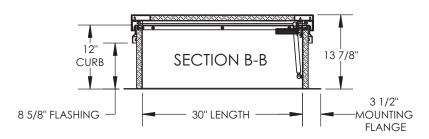

## SPECIFICATIONS:

- (1) COVER: 11GA (.090) ALUMINUM ,STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN.
- (2) CURB: 11GA (.090) ALUMINUM CURB COUNTERFLASH WITH EZ TABS.
- 3 FINISH: MILL
- (4) INSULATION: 1" POLYISO R-6 (5.6 LTTR)IN CURB,
  - 1" POLYSTYRENE R-4 (3.8 LTTR)IN COVER.
- (5) GASKET: EXTRUDED EPDM RUBBER ADHESIVE BACKED GASKET SEAL COUNTINUOUS AROUND COVER.
- **(A) SPRING:** GAS SPRING WITH DAMPER FOR SMOOTH, CONTROLLED, COUNTERBALANCED LIFT ASSISTANCE.
- (7) HINGE: PINTLE HINGE WITH STAINLESS STEEL HINGE PINS.
- (8) HOLD OPEN ARM: ZINC PLATED STEEL AUTOMATIC HOLD OPEN ARM LOCKS COVER IN FULLY OPEN POSITION WITH RED VINYL GRIP HANDLE PULL RELEASE.

- ⟨₱⟩ LATCH: ZINC PLATED STEEL SLAM LATCH, HOLDS COVER CLOSED
  AGAINST 20PSF WIND UPLIFT, INTERIOR AND EXTERIOR TURN HANDLES WITH
  PADLOCK HASPS.
- $\bigcirc$  PULL HANDLE: INTERIOR PULL DOWN HANDLE, SAFETY YELLOW POWDER COAT

## NOTES:


-WHEN INSTALLING ON A PITCHED ROOF UP TO 7:12, THE HINGE SIDE(LENGTH) MUST BE PARALLEL TO THE SLOPE.

-WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB. THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE.

ROOF HATCH SIZE 36" (WIDTH) × 30" (LENGTH) CLEAR OPENING 28"(WIDTH) × 29 1/2" (LENGTH) ROUGH OPENING 36" (WIDTH) × 30" (LENGTH)

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART:				TBA3630	
TRABUILT				TITLE: Roof Hatch, Single Dr., Zinc Hdw., Alum Curb and Cover, Mill Finish, Single Wall Curb	
	NAME	DATE	SIZE	DWG. NO. TBD030_TBA36X30	REV
DRAWN	SGS	04/01/15	Α		-

RELEASED IMT 04/01/15 WEIGHT: 63 lbs

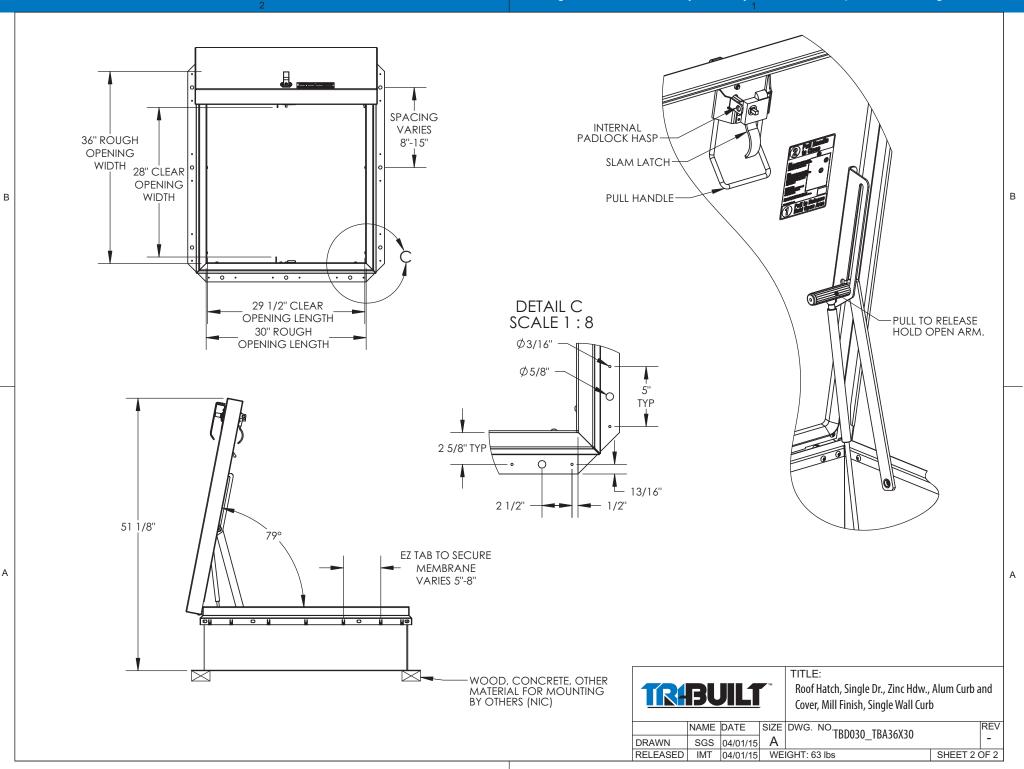

2